

**MURANO**  
**DOWNLIGHTS**  
3", 5", 6" Euro Collection



**[ FEATURES ]**


The Murano is a high-performance recessed downlight offering reduced glare and high visual comfort. Available in round 3" fixed or 5" and 6" adjustable, the Murano is one of the most flexible downlights in the market. Its modular design with a variety of light engines and optics allows for suitable use in countless applications. This downlight is designed for easy installation, removal, and maintenance from below the ceiling to reduce capital and operating costs. The Murano is ideal for ambient or accent lighting in commercial, retail, hospitality, and residential settings.


**[ LUMINAIRE INFORMATION ]**

RECESSED 

Product Detail




|                      |  |
|----------------------|--|
| Lumens/Watts (3000K) | <b>1100lm/15W<sup>1</sup> - 3 &amp; 5 Inch (Standard)</b><br><b>2000lm/25W<sup>2</sup> - 5 Inch (Standard)</b><br>1700lm/20W <sup>2</sup> - 5 Inch<br>2400lm/28W <sup>3</sup> - 6 Inch<br>2800lm/34W <sup>3</sup> - 6 Inch |
| Input Voltage        | 120-277V   |
| Efficacy             | Up to 90lm/W   |
| CRI                  | >90Ra  |
| Beam Angle           | <b>55° (Standard), 24°, 38°</b>  |
| CCT                  | 3000K, 3500K, 4000K  |
| Dimming              | <b>0-10V (20W-34W Standard), Phase Dimming 10-100% (15W Standard), Dual (Consult Factory)</b>  |
| Trim Colour          | <b>White (Standard), Black, Silver</b>   |
| Ingress Protection   | IP20 Dry Location, Wet Location Option <sup>5</sup> (3in)  |
| Warranty             | 5 yrs  |
| Certification        |   |

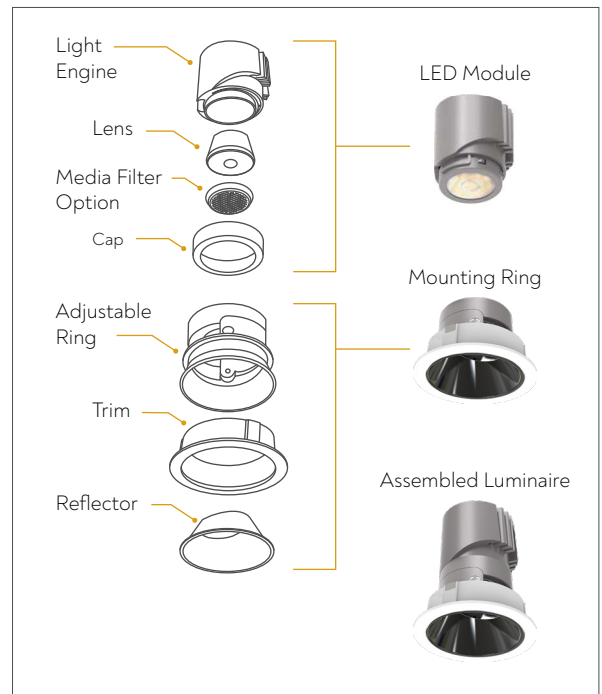


[ DIMENSIONS ]

| Euro Collection / Model                  | D / W          | H               | Cutout Size D / W |
|--|----------------|-----------------|-------------------|
| EURO3 /<br>3 Inch* Murano Round MUR3 (R) | Ø85mm (3.35")  | 86.5mm (3.41")  | Ø75mm (2.95")     |
| EURO4 /<br>5 Inch* Murano Round MUR5 (R) | Ø125mm (4.92") | 112.5mm (4.43") | Ø110mm (4.33")    |
| EURO6 /<br>6 Inch* Murano Round MUR6 (R) | Ø145mm (5.71") | 138.5mm (5.45") | Ø125mm (4.92")    |

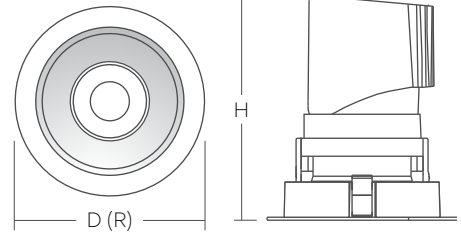

[ TRIM ]

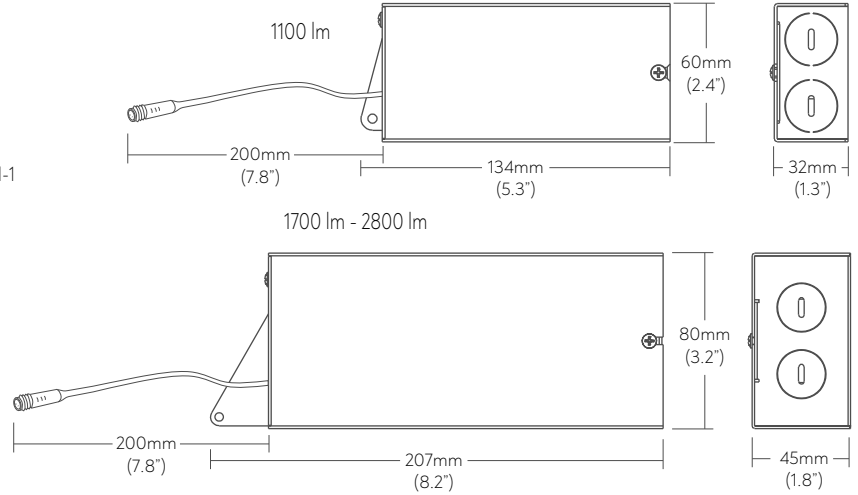


[ DRIVER ENCLOSURE ]



[ ORDER CODE ]

| MODULE  |  |  |  |  | DRIVER  |   |   |  |
|---|--|--|--|--|---|---|---|--|
| <b>COLLECTION</b>   | <b>BEAM ANGLE</b>                              | <b>CCT</b>   | <b>CRI</b>   | <b>LUMENS</b>  | <b>DIMMING</b>  | <b>VOLTAGE</b>                                |   |  |
| EURO3 - MUR3<br>EURO4 - MUR5<br>EURO6 - MUR6                            | 55D - 55° (Standard)<br>24D - 24°<br>38D - 38° | 30K - 3000K<br>35K - 3500K<br>40K - 4000K<br>Consult factory for other CCT | 90 - 90CRI   | 11 - 1100lm <sup>1</sup> (EURO3 Standard) (EURO4)<br>20 - 2000lm <sup>2</sup> (EURO4 Standard)<br>17 - 1700lm <sup>2</sup> (EURO4)<br>24 - 2400lm <sup>3</sup> (EURO6)<br>28 - 2800lm <sup>3</sup> (EURO6) | V - 0-10V DIMMING (20W-34W)<br>T - PHASE DIMMING (15W ONLY)<br>X - DUAL 0-10V & PHASE DIMMING (Consult Factory) | UNV - 120-277V                                | * Nominal size<br>1. Available for 3" & 5" models only<br>2. Available for 5" model only<br>3. Available for 6" model only<br>4. Not available for 3" model<br>5. Available for 3" model only |  |
| TRIM  |  |  |  |  | OPTIONS   |   |   |  |
| <b>MODEL</b>  | <b>TILT</b>                                    | <b>TRIM</b>  | <b>REFLECTOR</b>   | <b>TRIM FINISH</b>   | <b># OF HEADS</b>   | <b>IP</b>                                     | <b>MEDIA FILTER</b>   | <b>NEW CONSTRUCTION PLATFORM</b>   |
| MUR3 - MURANO 3 INCH*<br>MUR5 - MURANO 5 INCH*<br>MUR6 - MURANO 6 INCH* | F - FIXED*<br>AD - ADJUSTABLE*                 | R - ROUND  | CS - CLEAR SPECULAR (Standard)<br>BC - BLACK CHROME (Anti-glare) | WH - WHITE (Standard)<br>BK - BLACK<br>SV - SILVER   | 1 - 1 HEAD  | WL03 - WET* LOCATION (MUR3) (Consult Factory) | HC - HONEYCOMB<br>SL - SOFT LENS  | (BLANK) - NONE<br>NCR1 - ADJUSTABLE 2" - 6" ROUND<br>NCR2 - FIXED 2", 4", 5" ROUND |

[ ORDER CODE CHART ]

| COLLECTION   | BEAM ANGLE                  | CCT                    | CRI   | LUMENS/<br>WATTS  | DIMMING  | VOLTAGE  | TRIM MODEL | TILT       | TRIM  | REFLECTOR   | FINISH                                   | # OF HEADS |
|--|-----------------------------|------------------------|-------|---|--|----------|------------|------------|-------|---|--|------------|
| <br>EURO3 | 55° (Standard),<br>24°, 38° | 3000K, 3500K,<br>4000K | >90Ra | 1100 lm/15W   | 10-100%  | 120-277V | MUR3       | FIXED      | ROUND | CLEAR<br>SPECULAR<br>(Standard),<br>BLACK<br>CHROME<br>(Anti-glare) | WHITE<br>(Standard),<br>BLACK,<br>SILVER | 1          |
| <br>EURO4 | 55° (Standard),<br>24°, 38° | 3000K, 3500K,<br>4000K | >90Ra | 2000 lm/25W<br>(Standard),<br>1100 lm/15W,<br>1700 lm/20W | 0-10V<br>(Standard),<br>DUAL 0-10V &<br>PHASE<br>DIMMING<br>(Consult<br>Factory) | 120-277V | MUR5       | ADJUSTABLE | ROUND | CLEAR<br>SPECULAR<br>(Standard),<br>BLACK<br>CHROME<br>(Anti-glare) | WHITE<br>(Standard),<br>BLACK,<br>SILVER | 1          |
| <br>EURO6 | 55°, 24°, 38°               | 3000K, 3500K,<br>4000K | >90Ra | 2400 lm/28W,<br>2800 lm/34W                               | 0-10V,<br>DUAL 0-10V &<br>PHASE<br>DIMMING<br>(Consult<br>Factory)               | 120-277V | MUR6       | ADJUSTABLE | ROUND | CLEAR<br>SPECULAR,<br>BLACK<br>CHROME<br>(Anti-glare)               | WHITE,<br>BLACK,<br>SILVER               | 1          |