

MURANO
DOWNLIGHTS
3", 5", 6" Euro Collection



[FEATURES]

The Murano is a high-performance recessed downlight offering reduced glare and high visual comfort. Available in round 3" fixed or 5" and 6" adjustable, the Murano is one of the most flexible downlights in the market. Its modular design with a variety of light engines and optics allows for suitable use in countless applications. This downlight is designed for easy installation, removal, and maintenance from below the ceiling to reduce capital and operating costs. The Murano is ideal for ambient or accent lighting in commercial, retail, hospitality, and residential settings.


[LUMINAIRE INFORMATION]

RECESSED

Product Detail




Lumens/Watts (3000K)	1100lm/15W¹ - 3 & 5 Inch (Standard) 2000lm/25W² - 5 Inch (Standard) 1700lm/20W ² - 5 Inch 2400lm/28W ³ - 6 Inch 2800lm/34W ³ - 6 Inch
Input Voltage	120-277V
Efficacy	Up to 90lm/W
CRI	>90Ra
Beam Angle	55° (Standard), 24°, 38°
CCT	3000K, 3500K, 4000K
Dimming	0-10V (20W-34W Standard), Phase Dimming 10-100% (15W Standard), Dual (Consult Factory)
Trim Colour	White (Standard), Black, Silver
Ingress Protection	IP20 Dry Location, Wet Location Option ⁵ (3in)
Warranty	5 yrs
Certification	

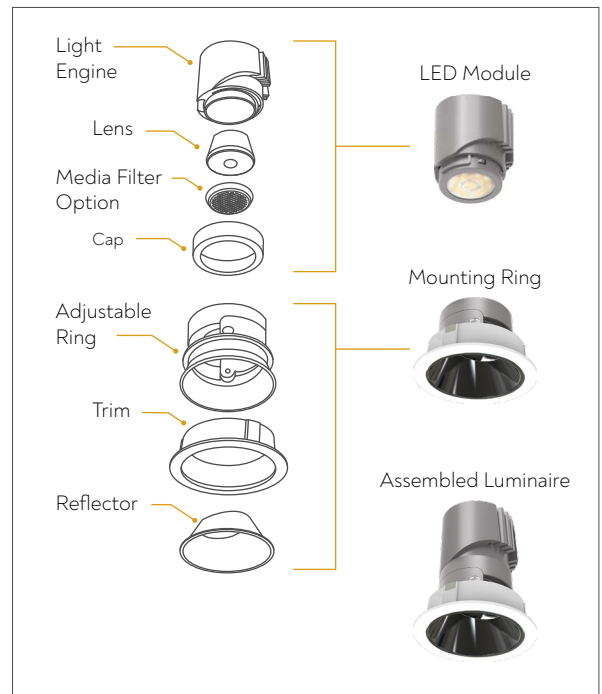


[DIMENSIONS]

Euro Collection / Model	D / W	H	Cutout Size D / W
EURO3 / 3 Inch* Murano Round MUR3 (R)	Ø85mm (3.35")	86.5mm (3.41")	Ø75mm (2.95")
EURO4 / 5 Inch* Murano Round MUR5 (R)	Ø125mm (4.92")	112.5mm (4.43")	Ø110mm (4.33")
EURO6 / 6 Inch* Murano Round MUR6 (R)	Ø145mm (5.71")	138.5mm (5.45")	Ø125mm (4.92")

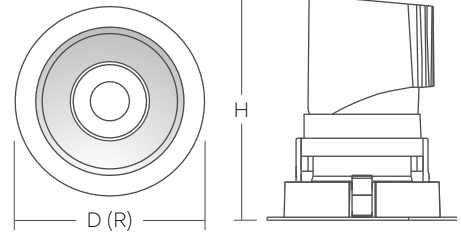

[TRIM]

[DRIVER ENCLOSURE]

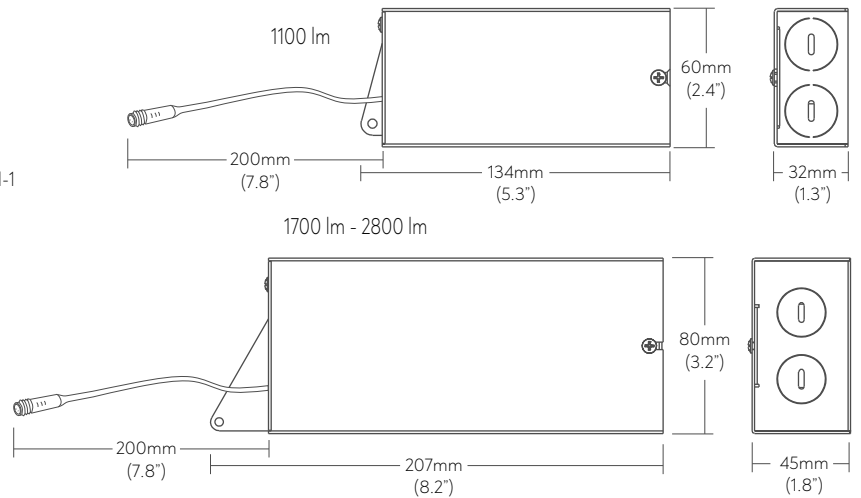




[ORDER CODE]

MODULE					DRIVER			
COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS	DIMMING	VOLTAGE		
EURO3 - MUR3 EURO4 - MUR5 EURO6 - MUR6	55D - 55° (Standard) 24D - 24° 38D - 38°	30K - 3000K 35K - 3500K 40K - 4000K Consult factory for other CCT	90 - 90CRI	11 - 1100lm' (EURO3 Standard) (EURO4) 20 - 2000lm' (EURO4 Standard) 17 - 1700lm' (EURO4) 24 - 2400lm' (EURO6) 28 - 2800lm' (EURO6)	V - 0-10V DIMMING (20W-34W) T - PHASE DIMMING (15W ONLY) X - DUAL 0-10V & PHASE DIMMING (Consult Factory)	UNV - 120-277V	* Nominal size 1. Available for 3" & 5" models only 2. Available for 5" model only 3. Available for 6" model only 4. Not available for 3" model 5. Available for 3" model only	
TRIM					OPTIONS			
MODEL	TILT	TRIM	REFLECTOR	TRIM FINISH	# OF HEADS	IP	MEDIA FILTER	OPTION
MUR3 - MURANO 3 INCH* MUR5 - MURANO 5 INCH* MUR6 - MURANO 6 INCH*	F - FIXED* AD - ADJUSTABLE*	R - ROUND	CS - CLEAR SPECULAR (Standard) BC - BLACK CHROME (Anti-glare)	WH - WHITE (Standard) BK - BLACK SV - SILVER	1 - 1 HEAD	WL03 - WET* LOCATION (MUR3) (Consult Factory)	HC - HONEYCOMB SL - SOFT LENS	(BLANK) - NONE NCR1 - NEW CONSTRUCTION PLATFORM NCR2 - NEW CONSTRUCTION PLATFORM*



[ORDER CODE CHART]

COLLECTION	BEAM ANGLE	CCT	CRI	LUMENS/ WATTS	DIMMING	VOLTAGE	TRIM MODEL	TILT	TRIM	REFLECTOR	FINISH	# OF HEADS
 EURO3	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	1100 lm/15W	10-100%	120-277V	MUR3	FIXED	ROUND	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
 EURO4	55° (Standard), 24°, 38°	3000K, 3500K, 4000K	>90Ra	2000 lm/25W (Standard), 1100 lm/15W, 1700 lm/20W	0-10V (Standard), DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	MUR5	ADJUSTABLE	ROUND	CLEAR SPECULAR (Standard), BLACK CHROME (Anti-glare)	WHITE (Standard), BLACK, SILVER	1
 EURO6	55°, 24°, 38°	3000K, 3500K, 4000K	>90Ra	2400 lm/28W, 2800 lm/34W	0-10V, DUAL 0-10V & PHASE DIMMING (Consult Factory)	120-277V	MUR6	ADJUSTABLE	ROUND	CLEAR SPECULAR, BLACK CHROME (Anti-glare)	WHITE, BLACK, SILVER	1

