


**DALLAS  
DOWNLIGHTS**  
Selectable CCT



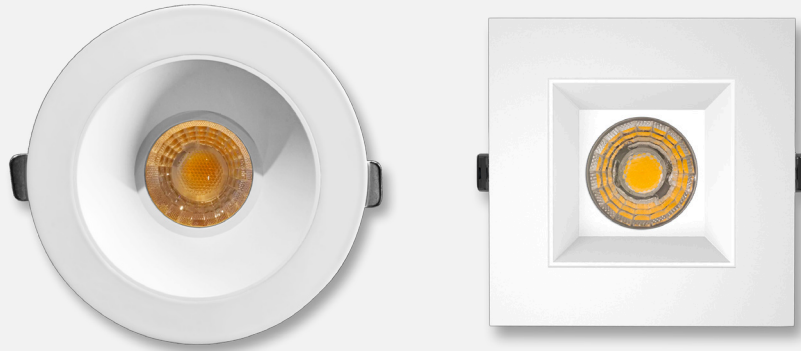



**[ FEATURES ]**

Dallas LED downlights are available in 2" and 4" model sizes with round or square trim. Refracted optic lens with medium beam angle and 90 CRI delivers a soft uniform light with vivid color. Select from 2700K<sup>1</sup>, 3000K, 3500K<sup>1</sup>, 4000K or 5000K using the on-board CCT selector. Ideal for ambient or accent lighting in residential, hospitality, commercial and retail stores. Easy installation and service from below ceiling. Air tight, damp location and IC rated for use in insulated ceilings.

**[ LUMINAIRE INFORMATION - 2 Inch\* ]**



RECESSED 

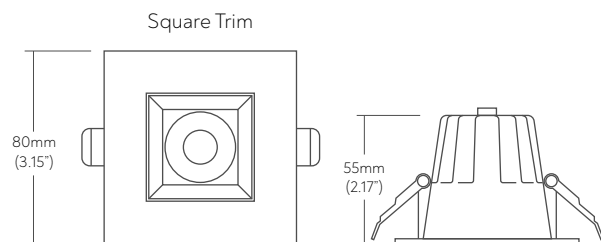
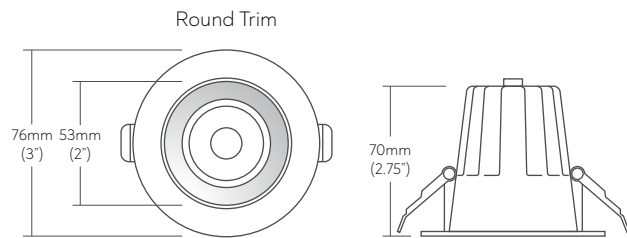
Product Detail	
Lumens/Watts	600lm/8W
Input Voltage	100-130V AC, 50/60HZ
Efficacy	75lm/W
CRI	>90Ra
R9	60 (3000K), 78 (4000K), 71 (5000K)
Beam Angle	Medium
CCT	3000K, 4000K, 5000K Selectable
Dimming	Phase Dimming 10-100%
Warranty	5 yrs
Certification	 IC, Air Tite, Damp Location





Cutout Size: 65mm (2.5")

**[ LUMINAIRE INFORMATION - 4 Inch\* ]**

Product Detail	
Lumens/Watts	1100lm/12W
Input Voltage	100-130V AC, 50/60HZ
Efficacy	90lm/W
CRI	>90Ra
R9	60 (3000K), 74 (4000K), 66 (5000K)
Beam Angle	Medium
CCT	2700K <sup>1</sup> , 3000K, 3500K <sup>1</sup> , 4000K, 5000K Selectable
Dimming	Phase Dimming 10-100%
Warranty	5 yrs
Certification	 IC, Air Tite, Damp Location

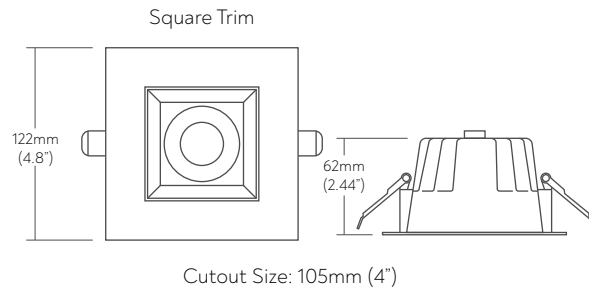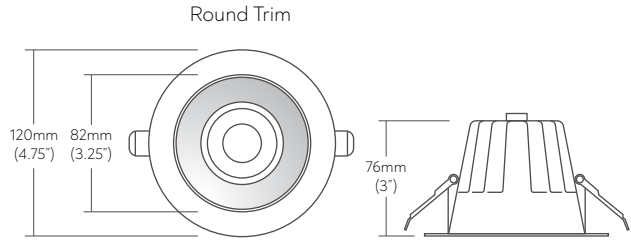

**[ EXTERNAL DRIVER/ON-BOARD CCT CHANGE ]**

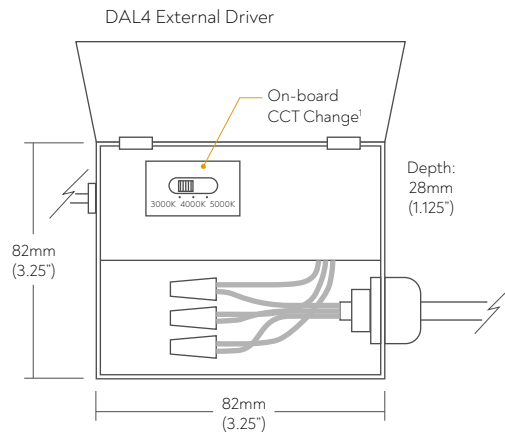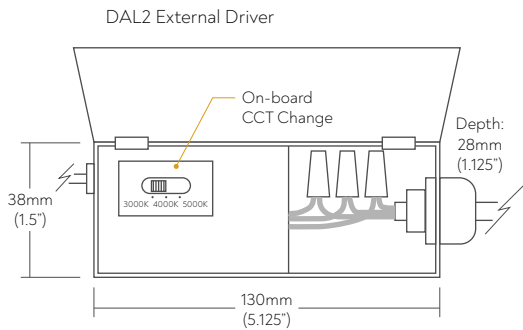

**[ ORDER CODE ]**

<b>MODEL</b>	<b>TRIM</b>	<b>OCC</b>	<b>M</b>	<b>120</b>	<b>90</b>	<b>W</b>	<b>NEW CONSTRUCTION PLATFORM</b>
DAL2 - 2 INCH*	RD - ROUND	OCC - ON-BOARD CCT CHANGE	M - MEDIUM	120 - 120V	90 - 90CRI	W - WHITE	NCR1 - ADJUSTABLE 2" - 6" ROUND NCR2 - FIXED 2", 4", 5" ROUND NCS1 - ADJUSTABLE 2" - 6" SQUARE
DAL4 - 4 INCH*	SQ - SQUARE						

**[ QUICK SHIP PART # ]**

JXL-COB02-R08W-CCT - DAL2-RD-OCC-M-120-90-W	JXL-COB02-S08W-CCT - DAL2-SQ-OCC-M-120-90-W
JXL-COB04-R12W-5CCT - DAL4-RD-OCC-M-120-90-W	JXL-COB04-S12W-CCT - DAL4-SQ-OCC-M-120-90-W

\* Nominal size  
1. 2700K and 3500K CCT options only available for 4 inch round downlight